


STANDARD STREETS


6' P.U.E. REQUIRED  
BEHIND SIDEWALK

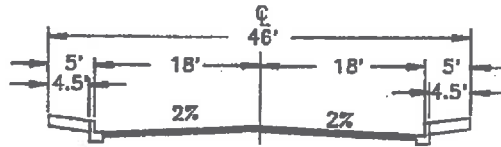

NOTE:  
THIS STANDARD  
MAY ONLY BE USED  
WHERE NO UTILITIES  
ARE LOCATED IN  
THE SIDEWALK AREA


46' RESIDENTIAL - PUBLIC STREET  
(MINIMUM STANDARD WITH P.U.E.)

NO P.U.E. REQUIRED  
BEHIND SIDEWALK

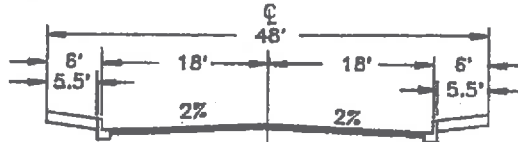


48' RESIDENTIAL - PUBLIC STREET  
(MINIMUM STANDARD WITHOUT P.U.E.)

6' P.U.E. REQUIRED  
BEHIND SIDEWALK

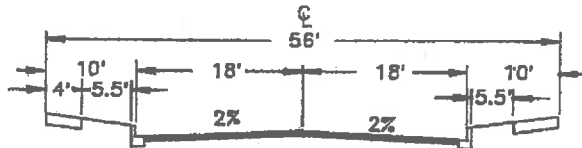

56' RESIDENTIAL - PUBLIC STREET  
(STANDARD WITH PLANTER STRIP)

NO P.U.E. REQUIRED  
BEHIND SIDEWALK

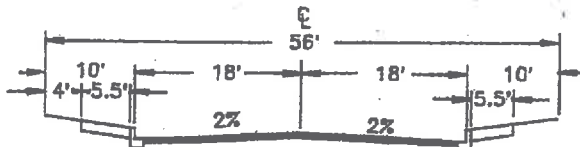

56' RESIDENTIAL - PUBLIC STREET  
(STANDARD WITHOUT PLANTER STRIP)

NOTE:  
USE OF THIS STANDARD  
IS INTENDED TO ACHIEVE  
COMPATIBILITY WHEN  
RECONSTRUCTING OR  
COMPLETING CONSTRUCTION  
OF AN EXISTING STREET  
BUILT PREDOMINANTLY  
WITH THIS CROSS-SECTION.

			CITY OF HAYWARD ENGINEERING DIVISION		<b>STANDARD STREET SECTIONS</b>	DWG. NO. <b>SD-102</b>
			DRAWN BY: F. M.	DATE MARCH 1993		FILED
			CHECKED BY: H. G. D.	SCALE: 1" = 20'		
REV	DATE	BY	APPD. BY: <i>DAB</i>	APPROVED: <i>[Signature]</i>		SHT. 2 OF 4
			CITY ENGINEER	DIR. PUBLIC WORKS		