


STANDARD STREETS


6' P.U.E. REQUIRED
BEHIND SIDEWALK



NOTE:
THIS STANDARD
MAY ONLY BE USED
WHERE NO UTILITIES
ARE LOCATED IN
THE SIDEWALK AREA


46' RESIDENTIAL - PUBLIC STREET
(MINIMUM STANDARD WITH P.U.E.)

NO P.U.E. REQUIRED
BEHIND SIDEWALK

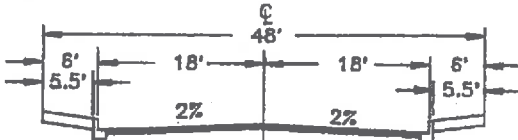


48' RESIDENTIAL - PUBLIC STREET
(MINIMUM STANDARD WITHOUT P.U.E.)

6' P.U.E. REQUIRED
BEHIND SIDEWALK

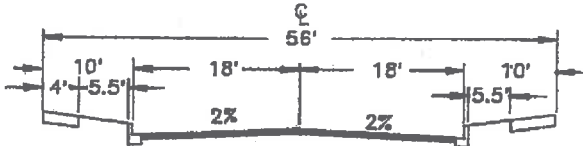

56' RESIDENTIAL - PUBLIC STREET
(STANDARD WITH PLANTER STRIP)

NO P.U.E. REQUIRED
BEHIND SIDEWALK

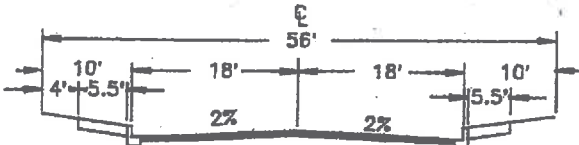

56' RESIDENTIAL - PUBLIC STREET
(STANDARD WITHOUT PLANTER STRIP)

NOTE:
USE OF THIS STANDARD
IS INTENDED TO ACHIEVE
COMPATIBILITY WHEN
RECONSTRUCTING OR
COMPLETING CONSTRUCTION
OF AN EXISTING STREET
BUILT PREDOMINANTLY
WITH THIS CROSS-SECTION.

			CITY OF HAYWARD ENGINEERING DIVISION		STANDARD STREET SECTIONS	DWG. NO. SD-102
			DRAWN BY: F. M.	DATE: MARCH 1993		FILED
			CHECKED BY: H. G. D.	SCALE: 1" = 20'		
REV	DATE	BY	APPD. BY: <i>DAB</i>	APPROVED: <i>[Signature]</i>		SHT. 2 OF 4
			CITY ENGINEER	DIR. PUBLIC WORKS		